

• Technical Specification

Model	LK08-T1
Material	
Base & Cover	PET
Product Color	Yellow
Pattern	Nano Sliver paste
Dimension	
Length	LK08-T1: 200M max
Film Thickness	around 0.3mm
Electrical	
Input Voltage	+ 5Vpp
Insulation Resistance	1G Ω ~
Operation Temperature	-10°C ~ +90°C
Weight	Sensor: below 20g/M
Adhesive	acryl, silicon, nonwoven



• Accessories



LK08C-JP01-WP

Jumper Cable



LK08C-JP02-WP

Jumper Connector



LK08C-EDS03-WP


End Connector



LK08C-ST501-WP

Leader Cable

- Applications

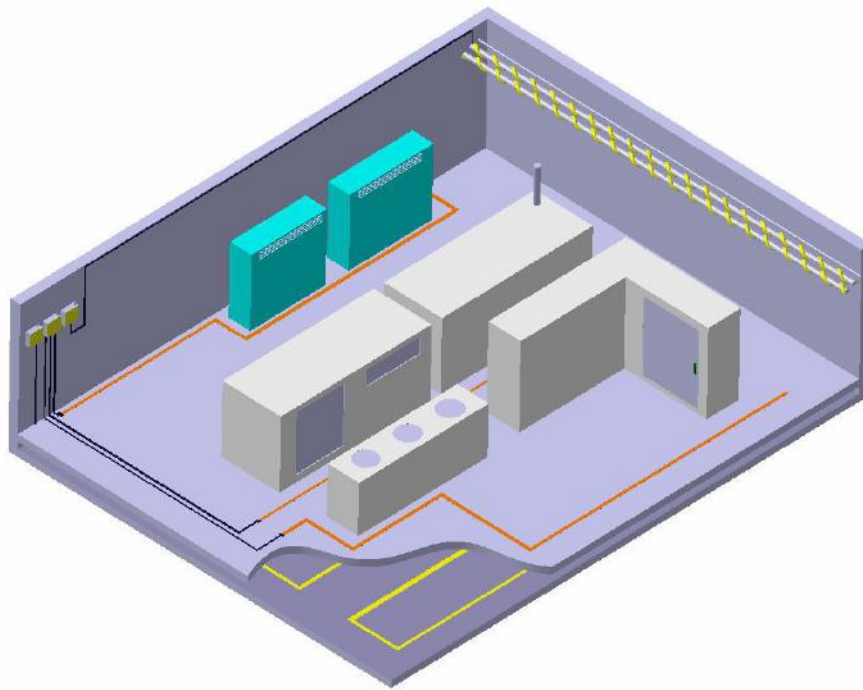

- Pipe, Pipe junction
- Facility
- Equipments (inside and outside)
- Building basement
- Floor
- Ceiling
- Server room / Network room

FLEXLEAK can be very easily install to customer's concern area. The alarm module controller has relay output. It can be connected to signal light, sound buzzer, central monitoring system, etc.

AQUTEK Asia Limited

Tel: (852) 8201 8829 | Fax: (852) 3011 5129

Room 834-835, Block 2, Yip On Factory Estate, Wang Hoi Road, Kowloon Bay, Hong Kong | www.Aqutek.Asia